


This document discloses proprietary information of Mid-Continent Instrument Co., Inc. It may be reproduced or disclosed only with written permission of Mid-Continent Instrument Co., Inc and is not to be used in any way detrimental to the interests of Mid-Continent Instrument Co., Inc.

Revisions

ECO	Rev.	Description	Date	Approved

Logo and company name have been changed in title block only. No functional or technical changes have been made. Revision remains unchanged.

25 Pin D-Sub Connector
NAMEPLATE (8012577)

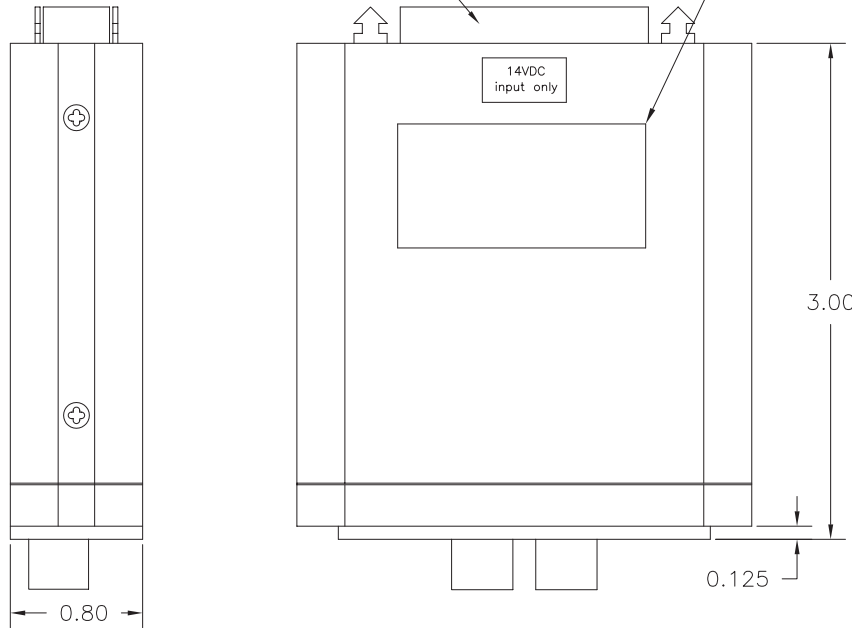

NOTE: Refer to manual number 7019458 for installation information.

SPECIFICATIONS:

- TSO Compliance: TSO C129
Applicable Documents:
RTCA DO-160C, DO-208
- Operating Temperature Range:
-55°C to +70°C
- Humidity: 95% Non-Condensing.
- Altitude Range: 0 to 55,000 ft.
- Vibration: Cat. M and N.
- Operational Shock: Rigid Mounting,
6G Operational, 15G Crash Safety.
- Current: 0.40 Amps typical.
- Controls:

NAV/GPS: Alternate action switch.
GPS/APR: Momentary switch.
OBS/LEG: Alternate action switch.


9) Annunciations and colors:

NAV: white.
GPS: green.
MSG: amber.
ARM: white.
ACTV: green.
WPT: amber.
LEG: green.
OBS: white.

- Overall color shall be black.
- Weight shall be 0.30 lbs.

25 PIN MALE
D-SUB CONNECTOR

NAV CIRCUIT BKR	1
GPS ANN	2
MSG ANN	3
WPT ANN	4
14V DIMMER IN	5
GPS APR ARM SELECT	6
LAMP TEST	7
ACTV ANN	9
ARM ANN	10
ILS ENERGIZE	11
14VDC POWER	13
NAV ANN	16
GPS DISPLAY	18
EXTERNAL RELAY ENERGIZE	24
GROUND	25

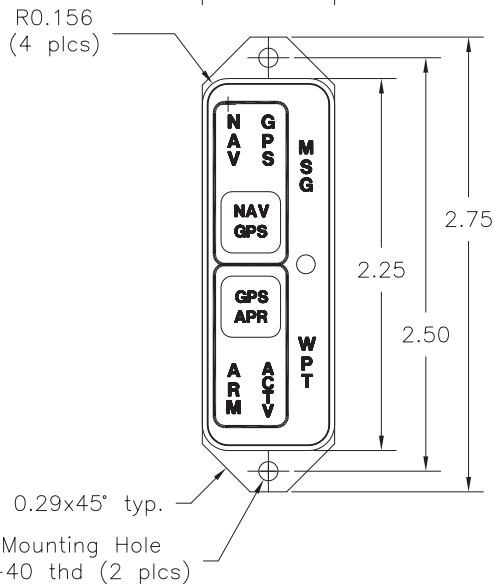

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN INCHES
TOLERANCE: FRACTIONAL = ±1/64
.XX = ±.020
.XXX = ±.010
.XXXX = ±.002
ANGULAR = ±0.5°
CONCENTRICITY: .005 TIR
BREAK ALL SHARP EDGES
THREADS PER MIL-S-7742

DRAWN	J. Reed	11/15/01
APPROVED	ScN	11/15/01
TOP LEVEL ASSY:	9014697-4	
USED ON:		
END ITEM:		
CODE IDENT. NO.:	59742	



TITLE:	ANNUNCIATION CONTROL UNIT	PART NUMBER:	MD41-1534
SCALE:	None	SHEET	1 of 1

SURFACE ROUGHNESS — — — ✓