
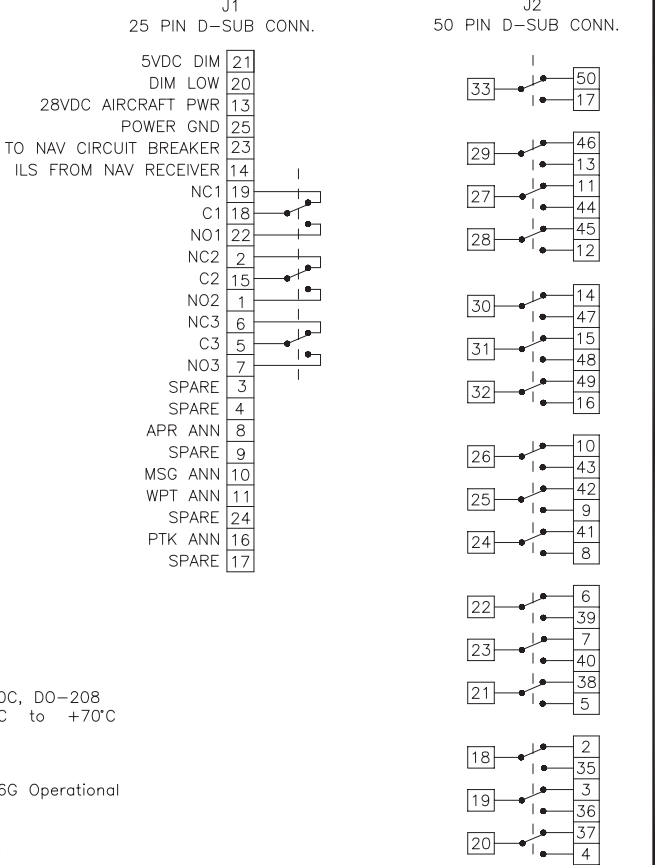


Revisions				Date	Approved
ECO	Rev.	Description			

Logo and company name have been changed in title block only. No functional or technical changes have been made. Revision remains unchanged.

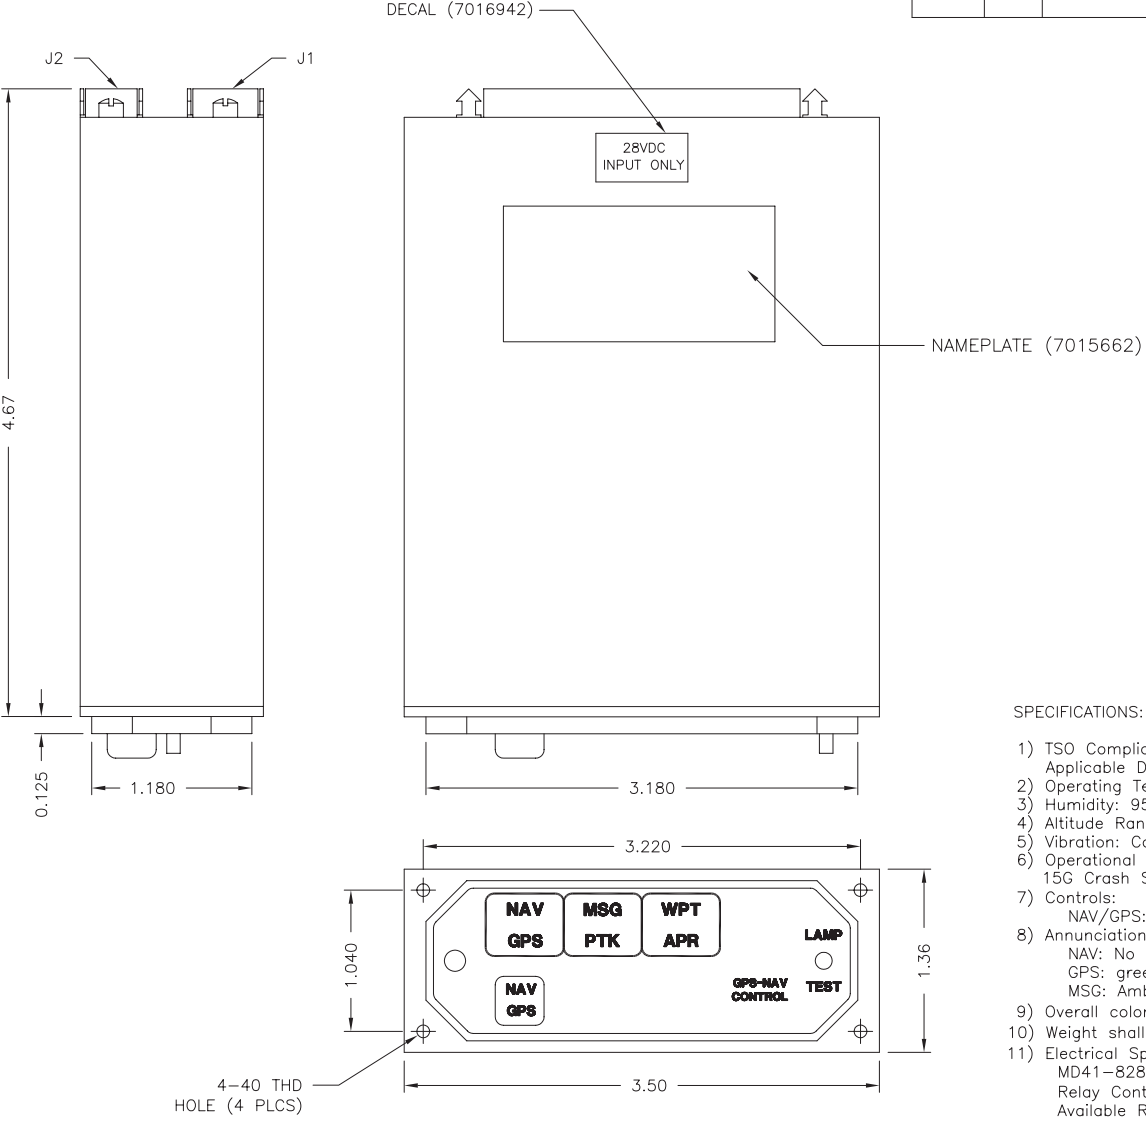

SPECIFICATIONS:

- 1) TSO Compliance: TSO C129
Applicable Documents: RTCA D0-160C, D0-208
- 2) Operating Temperature Range: -55°C to +70°C
- 3) Humidity: 95% Non-Condensing.
- 4) Altitude Range: 0 to 55,000 ft.
- 5) Vibration: Cat. M and N.
- 6) Operational Shock: Rigid Mounting, 6G Operational 15G Crash Safety.
- 7) Controls:
NAV/GPS: Alternate action switch.
- 8) Annunciations and colors:
NAV: No color PTK: Amber
GPS: green WPT: Amber
MSG: Amber APR: Green
- 9) Overall color shall be black.
- 10) Weight shall be 0.75 lbs.
- 11) Electrical Specifications:
MD41-828 (5V); (28VDC); 0.40Amp
Relay Contact Current Rating; 2Amp. DC
Available Relay Poles (SPDT); 19

(All relays shown in NAV position, for installation information refer to manual number 7016074).

- Notes:**
- 1) Mating connectors:
For J1: 25 pin female Positronic
P/N RD25F10JVLO (MCI P/N: 7014517).
For J2: 50 pin female Positronic
P/N RD50F10JVLO (MCI P/N: 7014509).

This document discloses proprietary information of Mid-Continent Instrument Co., Inc. It may be reproduced or disclosed only with written permission of Mid-Continent Instrument Co., Inc. and is not to be used in any way detrimental to the interests of Mid-Continent Instrument Co., Inc.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES TOLERANCE: FRACTIONAL = ± 1/64 .XX = ± .015 .XXX = ± .005 .XXXX = ± .002 ANGULAR = ± 0.5° CONCENTRICITY: .005 TIR BREAK ALL SHARP EDGES THREADS PER MIL-S-7742 SURFACE ROUGHNESS _____ ✓	DRAWN	D. Tran	5/13/03		TITLE: Annunciation Control Unit	PART NUMBER: MD41-828(5V)
	APPROVED	SdN	5/13/03			
	TOP LEVEL ASSY:	9015662			SCALE: None	DO NOT SCALE THIS DRAWING
	USED ON:					
END ITEM:	CODE IDENT. NO.: 59742					