

TRUE BLUE POWER®

A division of Mid-Continent Instrument Co., Inc.

2000VA DC-to-AC Inverter

TI2000

Manufactured by Mid-Continent Instrument Co., Inc.

The TI2000 Inverter provides 2000 watts of wall outlet power to cabin and galley accessories, including entertainment systems, personal electronic devices, microwave ovens, and coffee makers. It is ideal for emergency medical equipment, special mission and VIP cabin configurations.



TI2000

The TI2000 DC-to-AC Inverter is smaller, lighter and more efficient than competing units and includes input transient, overload and short-circuit protection up to 150% of the rated load.

Product features

OUTPUT POWER	2000 VA
INPUT VOLTAGE	20 – 36 VDC
OUTPUT VOLTAGE	115 VAC \pm 3%
OUTPUT FREQUENCY	60 Hz \pm 0.1%
EFFICIENCY	93%
REMOTE CONTROL	Remote On/Off optional
OVERLOAD AND SHORT-CIRCUIT PROTECTION	Input transient, overload and short-circuit protection (up to 150% of rated load without damage)
DESIGNED AND MANUFACTURED	Wichita, Kansas, USA
WARRANTY	Two-year limited

Kansas

9400 East 34th Street North
Wichita, Kansas 67226 USA
Tel 316.630.0101 800.821.1212
Fax 316.630.0723
tbp@mcico.com

California



16320 Stagg Street
Van Nuys, California 91406 USA
Tel 818.786.0300 800.345.7599
Fax 818.786.2734
tbp@mcico.com

truebluepowerusa.com

2000VA DC-to-AC Inverter

TI2000

Manufactured by Mid-Continent Instrument Co., Inc.

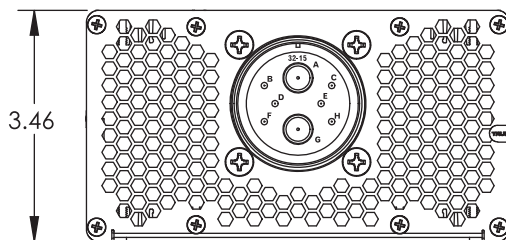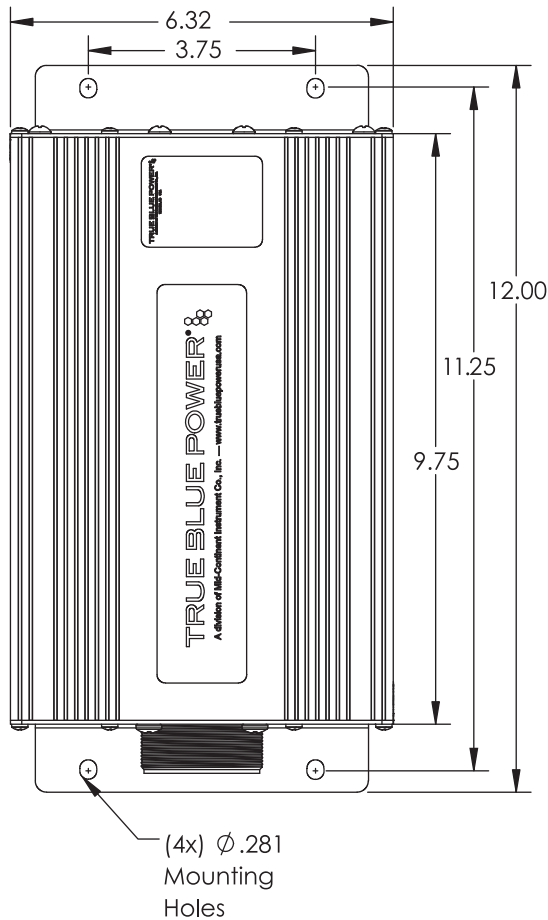

Technical specifications

INPUT VOLTAGE	20 – 36 VDC
INPUT CURRENT	80A at 28 VDC input
OUTPUT VOLTAGE	115 VAC \pm 3%
OUTPUT POWER	2000 VA
OUTPUT FREQUENCY	60 Hz \pm 0.1%
OUTPUT WAVEFORM	Single phase, true sine wave < 3% total harmonic distortion
WEIGHT	7.7 lbs. (3.49 kg)
ALTITUDE	55,000 ft
HUMIDITY	Tested to greater than 95% for 10 days, temperature cycle of 75° F to 160° F
TEMPERATURE	-67° F to +158° F (-55° C to +70° C)
INTEGRAL COOLING	Dual, electronically-controlled brushless fans
MATING CONNECTOR	P/N 9018784-1 P/N 9018550-2 (cable clamp / backshell)
CASE	Anodized aluminum extrusion, blue
CERTIFICATION	FAA TSO-C73 certified EASA ETSO-C73 certified RTCA DO-160G qualified