
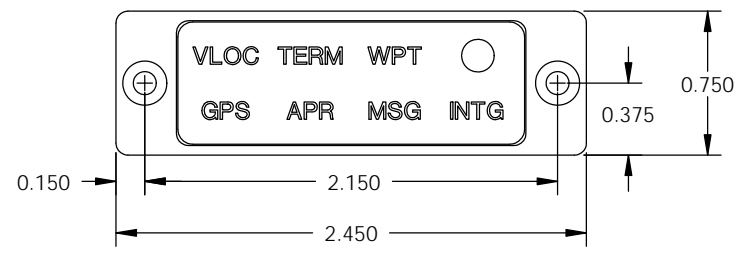
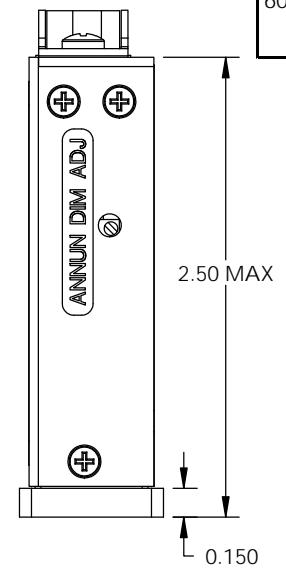



Configuration	
Dash #	

Revision				
ECO	Rev.	Description	Date	Approved
	A	Production Release.	1/19/07	MCH/BAW
4805	B	Add Installation Kit to BOM.	2/27/07	MCH/JBR
6091	C	Added "TERM" to green annunciations list. Show generic nameplate, did show details.	12/19/13	MKN/BCM

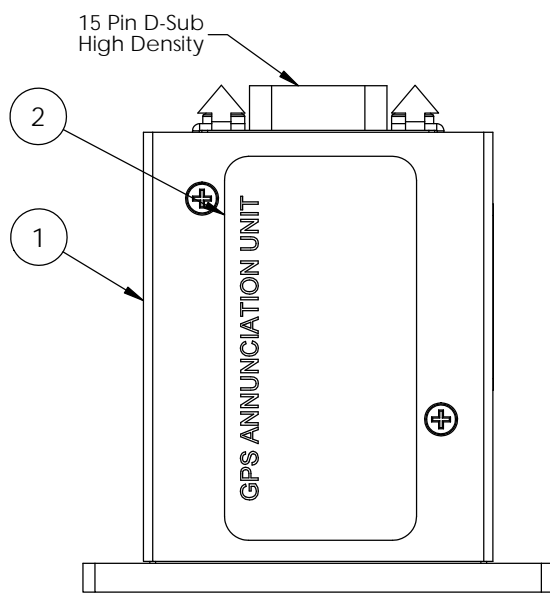

Connector Pinout			
Pin #		Pin #	
1	INTG Annun.	9	Reserved
2	WPT Annun.	10	Lamp Test
3	MSG Annun.	11	Reserved
4	TERM Annun.	12	Reserved
5	28VDC Power	13	Reserved
6	APR Annun.	14	Reserved
7	VLOC Annun.	15	Ground
8	GPS Annun.		

Specifications	
Power Input	28 VDC 0.25 Amps
Lighting	Incandescent Bulbs
Weight	0.2 lbs
Qualification Tests	FAA TSO C129
	RTCA DO-160C, DO-208 Env. Cat.F2-CA(MN)XXXXXXXXZBABATZXXX
Temperature	-55°C to 70 °C
Altitude	0 to +55,000 Ft.
Connector	ODD15M400V30
Mating Connector	DD15F10JVL0
Color	Bezel: Black
	VLOC Annunciation: White
	TERM, GPS and APR Annunciations: Green
	WPT, MSG, INTG Annunciations: Amber

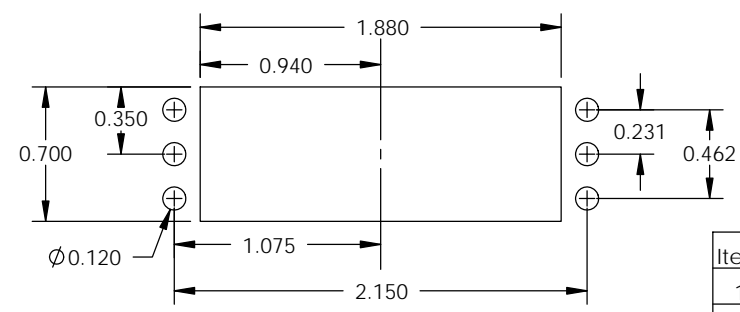

Panel Cutout

Item	Qty	Part Number	Description
1	1	9016476	Assy, MD41-1488W
2	1	8018822	Nameplate
3	1	9016480	Installation Kit

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.
TOLERANCE:
FRACTIONAL=±1/64
.XX=±0.015
.XXX=±0.005
.XXXX=±0.002
ANGULAR=±0.5°
CONCENTRICITY: 0.005 TIR
BREAK ALL SHARP EDGES
THREADS PER MIL-S-7742

DRAWN:
M. Hawks
1/4/2007

APPROVED:
BAW
1/19/2007

This document discloses proprietary information of Mid-Continent Instrument Co., Inc. It may be reproduced or disclosed only with written permission of Mid-Continent Instrument Co., Inc. and is not to be used in any way detrimental to the interests of Mid-Continent Instrument Co., Inc.



TITLE: GPS WAAS Annunciation Unit		PART NUMBER: MD41-1488W
SCALE: 1:1	DO NOT SCALE THIS DRAWING	SHEET: 1 of 1